



NOTE: 2" SEALED
EXPANSION JOINTS
WITH POLYETHELENE
COMPRESSION MATERIAL
JOINT FILLER
(2) 3/4" DOWEL BARS
REQUIRED BOTH SIDES

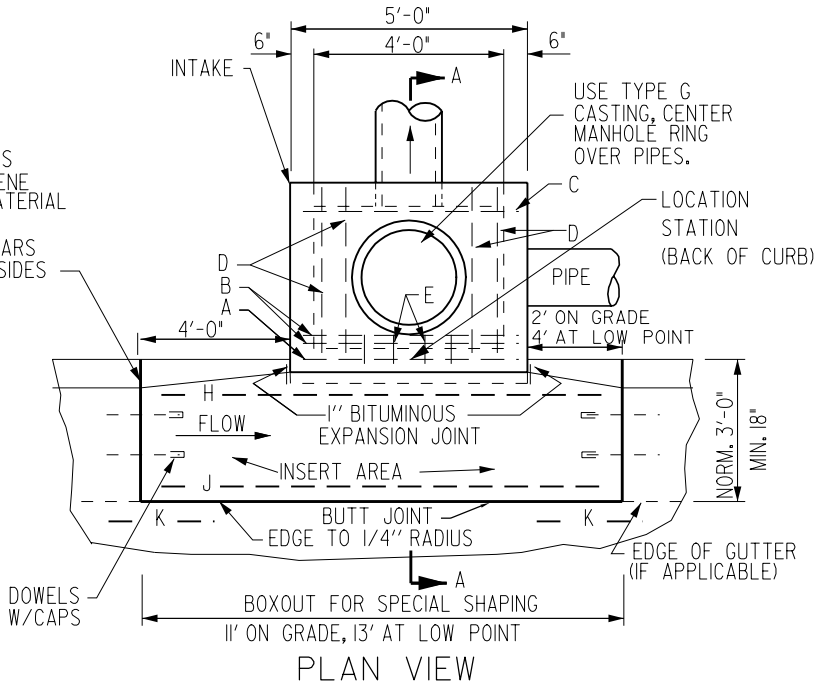

REINFORCING SCHEDULE			
MARK	LENGTH	NUMBER	SPACING
A	4'-9"	2	SEE DETAIL
B	4'-9"	3	SEE DETAIL
C	4'-9"	4	
D	3'-4"	4	SEE DETAIL
E	1'-2"	8	6"
F	4'-9"	4	13" + -
G	3'-9"	5	13" + -
H	① 10'-6"	2	SEE DETAIL
J	① 10'-6"	2	SEE DETAIL
K	② 3'-0"	2	SEE DETAIL



NOTE: ALL REINFORCING STEEL 1/2" DIA.
PLACED APPROXIMATELY 1-1/2" CLEAR
OF CONCRETE SURFACES

- ① 2' LONGER WHEN USING 13' BOXOUT.
② OMIT "K" IF ADJACENT PAVING IS A.C.C.

GENERAL NOTES:

ANY TRANSVERSE PAVEMENT JOINTS SHALL STOP AT EDGE OF INSERT AREA. JOINT LOCATIONS SHALL BE AS INDICATED HEREON, EXCEPT WHERE SPECIFICALLY MODIFIED BY OTHER PLAN DRAWINGS OR BY THE ENGINEER. JOINT AT END OF INSERT SHALL EXTEND THROUGH TO AN OPPOSITE FORM LINE.

FOR ADDITIONAL DETAILS
SEE SHEET 2.

I	01/25/01		"OPEN THROAT" TYPE M-F INTAKE	FIGURE: 6030.7
REV.	DATE	BY		
DATE: 01-01-98				SHEET 1 OF 2

			SECTION A-A	
REV.	DATE	BY	"OPEN THROAT" TYPE M-F INTAKE	FIGURE: 6030.7
DATE: 01-01-98				SHEET 2 OF 2